


6) Detailed diagram of relay & proper connections: (Terminals are labeled on actual relay!) Proper connections to relay are explained in the following steps.

- 1) To top of vacuum switch
- 2) From (+) fuse, and to red (+) motor
- 3) Vehicle ground, battery (-)
- 5) To black (-) motor



7) Splice two wires together, and connect with a female end connector as show below. The female end connector will connect to terminal 2 on the relay, one wire to the positive (+) switched power source (to fuse), and the last wire to the positive (+) pump motor side.

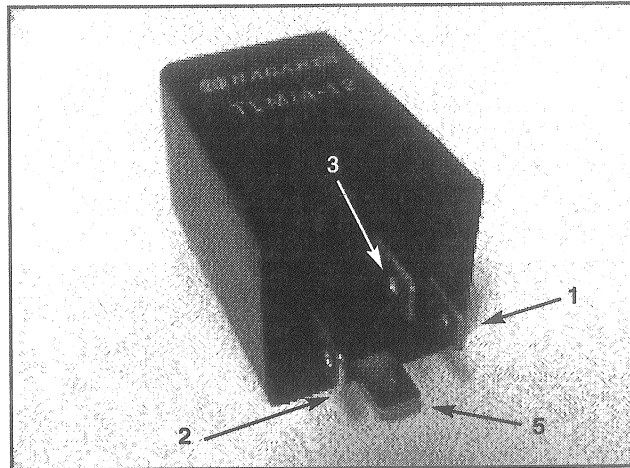