

# REMOVAL/INSTALL INSTRUCTIONS: SLIDING DOOR HANDLE BRACKET

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully. This product is only designed to function properly on specific vehicle applications. Please verify that the vehicle requirements match the product specifications and application notes for this part.

## REMOVAL/INSTALL OF SLIDING DOOR HANDLE BRACKET (926-288) Chrysler Town & Country 2016–08, Dodge Grand Caravan 2019–08

**PLEASE WEAR  
SAFETY GLASSES!**

This kit restores the handle mounting to the door by repairing the broken mounting flange.



### Removal Instructions

**STEP 1:** Remove interior handle bezel by using a plastic trim removal to gently pry from interior trim panel.



#### Disclaimer:

Even though every attempt is made to ensure this information is complete and accurate, it is impossible to account for all possible circumstances or situations. Please consult with a qualified auto technician before attempting to perform any work you are not qualified to do. Automobiles can be hazardous to work on; be sure to take all necessary safety precautions. Failure to do so may result in property damage or personal injury. Certain motor vehicle standards and performance requirements may apply to your motor vehicle (such as Federal Motor Vehicle Safety Standards by the National Highway Traffic Safety Administration). Be sure that your work is performed in accordance with such standards and that you do not disable any motor vehicle safety feature.

## REMOVAL/INSTALL INSTRUCTIONS: SLIDING DOOR HANDLE BRACKET

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully. This product is only designed to function properly on specific vehicle applications. Please verify that the vehicle requirements match the product specifications and application notes for this part.

**STEP 2:** Remove trim panel screw using a T-20 Torx bit driver.



**STEP 3:** Remove inner top corner trim end piece by gently prying in a forward direction using plastic trim tool.



**Disclaimer:**

Even though every attempt is made to ensure this information is complete and accurate, it is impossible to account for all possible circumstances or situations. Please consult with a qualified auto technician before attempting to perform any work you are not qualified to do. Automobiles can be hazardous to work on; be sure to take all necessary safety precautions. Failure to do so may result in property damage or personal injury. Certain motor vehicle standards and performance requirements may apply to your motor vehicle (such as Federal Motor Vehicle Safety Standards by the National Highway Traffic Safety Administration). Be sure that your work is performed in accordance with such standards and that you do not disable any motor vehicle safety feature.

## REMOVAL/INSTALL INSTRUCTIONS: SLIDING DOOR HANDLE BRACKET

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully. This product is only designed to function properly on specific vehicle applications. Please verify that the vehicle requirements match the product specifications and application notes for this part.

**STEP 4:** Gently pry trim panel along edges from door using removal tool. Once edges have been pried from door, gently use hands to unsnap rest of panel from door. Once panel is unsnapped from door, lift panel upwards to remove.



**STEP 5:** Remove access panel on inner panel by gently prying down using plastic trim tool.



**Disclaimer:**

Even though every attempt is made to ensure this information is complete and accurate, it is impossible to account for all possible circumstances or situations. Please consult with a qualified auto technician before attempting to perform any work you are not qualified to do. Automobiles can be hazardous to work on; be sure to take all necessary safety precautions. Failure to do so may result in property damage or personal injury. Certain motor vehicle standards and performance requirements may apply to your motor vehicle (such as Federal Motor Vehicle Safety Standards by the National Highway Traffic Safety Administration). Be sure that your work is performed in accordance with such standards and that you do not disable any motor vehicle safety feature.

## REMOVAL/INSTALL INSTRUCTIONS: SLIDING DOOR HANDLE BRACKET

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully. This product is only designed to function properly on specific vehicle applications. Please verify that the vehicle requirements match the product specifications and application notes for this part.

**STEP 6:** Reach through access opening and remove cable from handle by gently prying cable from handle.



**STEP 7:** Remove the 3 mounting screws retaining the handle to the body using an 8mm socket, and remove the handle from door.



**Disclaimer:**



Even though every attempt is made to ensure this information is complete and accurate, it is impossible to account for all possible circumstances or situations. Please consult with a qualified auto technician before attempting to perform any work you are not qualified to do. Automobiles can be hazardous to work on; be sure to take all necessary safety precautions. Failure to do so may result in property damage or personal injury. Certain motor vehicle standards and performance requirements may apply to your motor vehicle (such as Federal Motor Vehicle Safety Standards by the National Highway Traffic Safety Administration). Be sure that your work is performed in accordance with such standards and that you do not disable any motor vehicle safety feature.

# REMOVAL/INSTALL INSTRUCTIONS: SLIDING DOOR HANDLE BRACKET

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully. This product is only designed to function properly on specific vehicle applications. Please verify that the vehicle requirements match the product specifications and application notes for this part.

## Installation Instructions

**STEP 1:** Expand handle to open position and place the provided holding tool onto handle slider to keep handle in open position. This will keep the lever in the open position to ease installation of repair bracket.

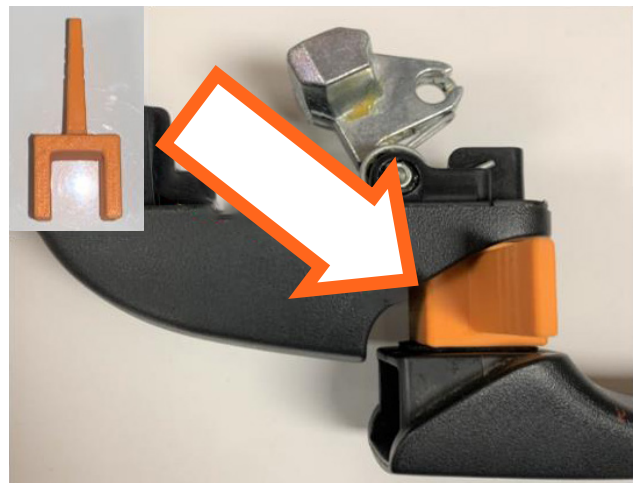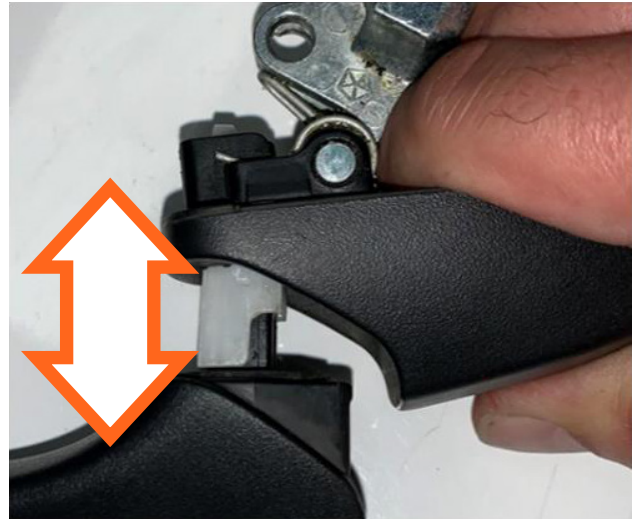

**STEP 2:** With holding tool still in place, reinstall original handle onto door. Have a helper hold handle onto door while installing repair bracket.





### Disclaimer:

Even though every attempt is made to ensure this information is complete and accurate, it is impossible to account for all possible circumstances or situations. Please consult with a qualified auto technician before attempting to perform any work you are not qualified to do. Automobiles can be hazardous to work on; be sure to take all necessary safety precautions. Failure to do so may result in property damage or personal injury. Certain motor vehicle standards and performance requirements may apply to your motor vehicle (such as Federal Motor Vehicle Safety Standards by the National Highway Traffic Safety Administration). Be sure that your work is performed in accordance with such standards and that you do not disable any motor vehicle safety feature.

## REMOVAL/INSTALL INSTRUCTIONS: SLIDING DOOR HANDLE BRACKET

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully. This product is only designed to function properly on specific vehicle applications. Please verify that the vehicle requirements match the product specifications and application notes for this part.

**STEP 3:** With the handle held in place, reach through the interior side of the door, place the repair bracket over the handle, and align with the mounting bolts. Install the repair bracket in the same orientation as shown. Install the 2 handle retaining screws by reinforcement bracket end at this time. Thread both screws to approximately 3/4ths of the way. Do not fully seat screws at this time.

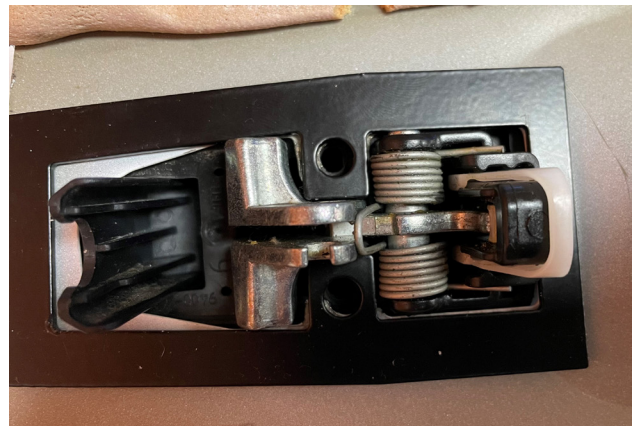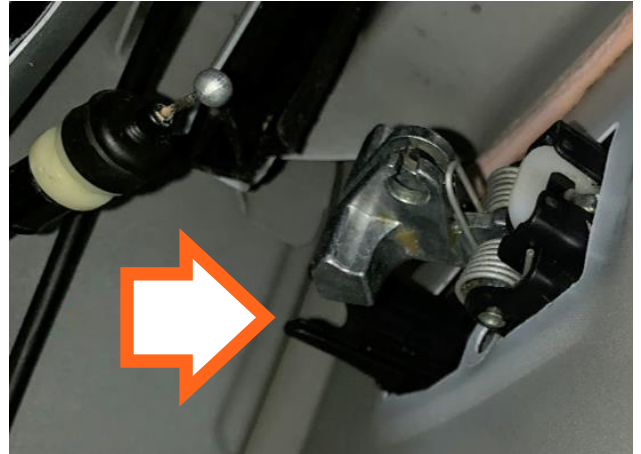

**STEP 4:** Pull on exterior handle in the same direction of handle operation and remove holding tool from handle.



**Disclaimer:**

Even though every attempt is made to ensure this information is complete and accurate, it is impossible to account for all possible circumstances or situations. Please consult with a qualified auto technician before attempting to perform any work you are not qualified to do. Automobiles can be hazardous to work on; be sure to take all necessary safety precautions. Failure to do so may result in property damage or personal injury. Certain motor vehicle standards and performance requirements may apply to your motor vehicle (such as Federal Motor Vehicle Safety Standards by the National Highway Traffic Safety Administration). Be sure that your work is performed in accordance with such standards and that you do not disable any motor vehicle safety feature.

## REMOVAL/INSTALL INSTRUCTIONS: SLIDING DOOR HANDLE BRACKET

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully. This product is only designed to function properly on specific vehicle applications. Please verify that the vehicle requirements match the product specifications and application notes for this part.

**STEP 5:** Install third handle mounting screw towards rear facing end of handle. Do not fully tighten at this time. Proceed to tighten 2 forward mounting screws and now tighten third mounting screw.

Ensure that handle is fully seated into door and all handle mounting screws are tight. Reattach release cable onto door handle. Verify proper operation of door handle. Reinstall handle access panel. Reinstall Trim panel & mounting screw. Reinstall interior handle bezel. Reinstall upper inner trim cap.



**Still need help?**  
**Please call our Technical Support team for assistance**  
**from our team of certified automotive experts.**  
**1-800-523-2492**

**Disclaimer:**

Even though every attempt is made to ensure this information is complete and accurate, it is impossible to account for all possible circumstances or situations. Please consult with a qualified auto technician before attempting to perform any work you are not qualified to do. Automobiles can be hazardous to work on; be sure to take all necessary safety precautions. Failure to do so may result in property damage or personal injury. Certain motor vehicle standards and performance requirements may apply to your motor vehicle (such as Federal Motor Vehicle Safety Standards by the National Highway Traffic Safety Administration). Be sure that your work is performed in accordance with such standards and that you do not disable any motor vehicle safety feature.