
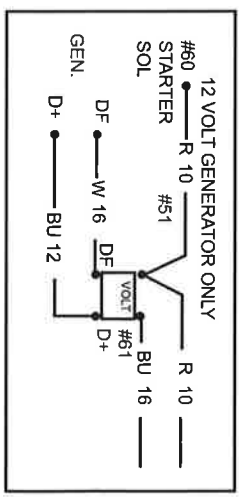


COLOR CODE	WIRE SIZE	GAUGE
Red	Large	10
Yellow	Med.	12
Green	Small	16
Blue		
Brown		
White		
Black		

WIRE SIZE	GAUGE
Large	10
Med.	12
Small	16

EXAMPLE 10 GAUGE RED = 10R  
 ANY ELECTRICAL ITEMS CONNECTED TO  
 FIBERGLASS MUST BE GROUNDED.

SEE BELOW FOR 12 VOLT SYSTEM

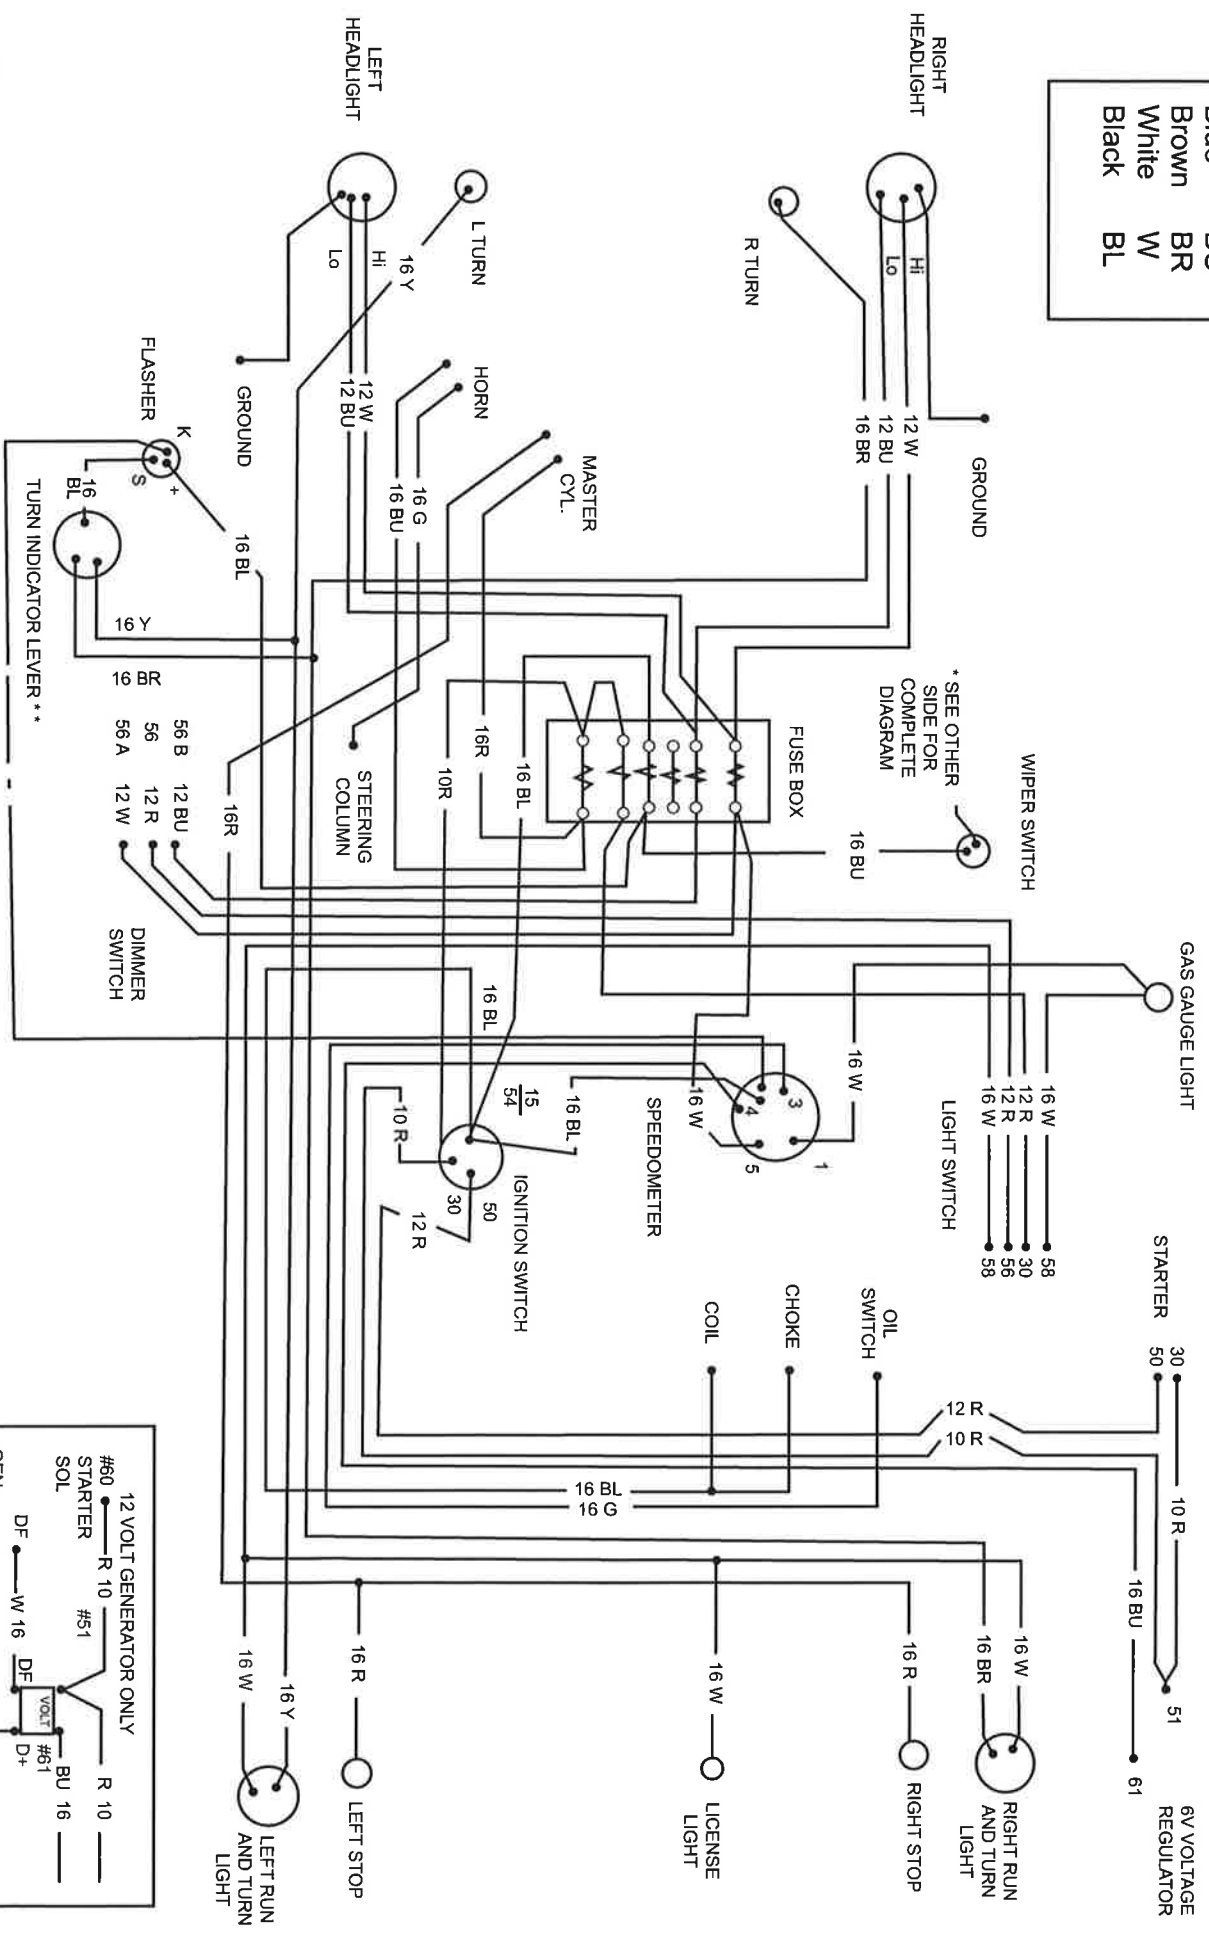


99-4053-0/03-05

\*\* DIAGRAM FOR "3 WIRE" TYPE TURN LEVER \*\*

**WIRE DIAGRAM FOR  
PARKING LITE - WIPER MOTOR - 4 LITE EMERGENCY FLASHER**

To install your Parking Lite, ground base of lamp to chassis. Use roll of 16 gage wire in fitting package to wire "HOT" from Park Lamps to Number 57 on Lt. Sw.

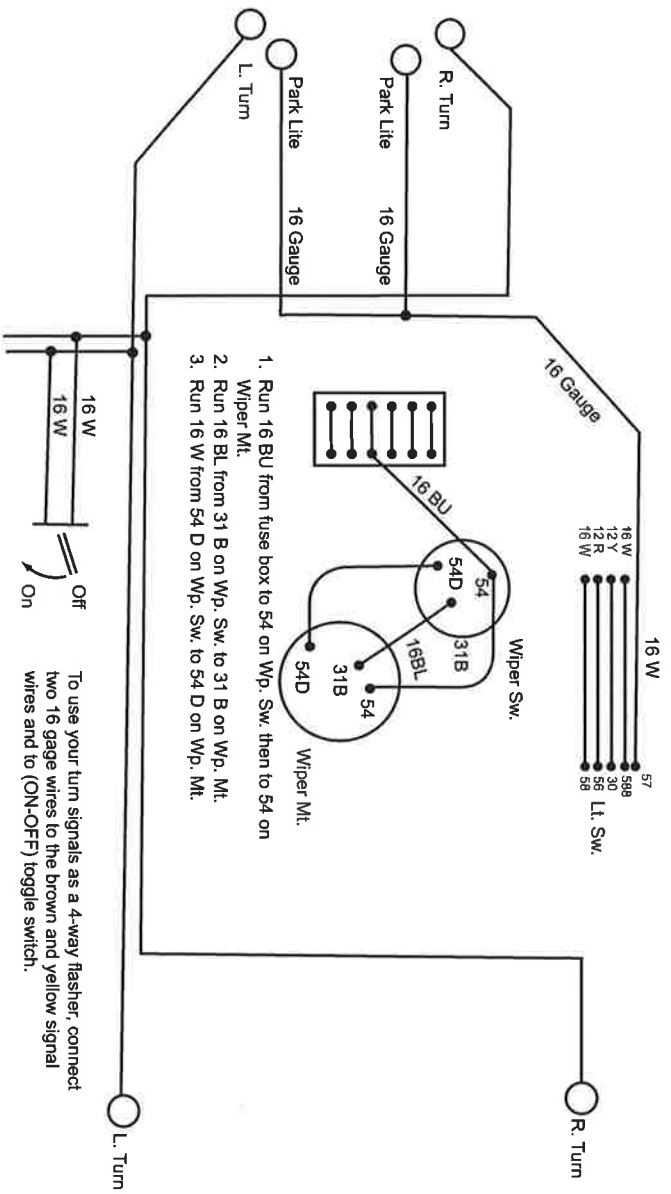

1. Run 16 BU from fuse box to 54 on Wp. Sw. then to 54 on Wiper Mt.
2. Run 16 BL from 31 B on Wp. Sw. to 31 B on Wp. Mt.
3. Run 16 W from 54 D on Wp. Sw. to 54 D on Wp. Mt.

**NOTE**

To operate - turn toggle switch on & turn indicator to left or right turn position.